

FORMED METAL COPING

ROOF MEMBRANE UNDER COPING

CONT. WOOD BLOCKING SLOPED 1+PER FOOT, MIN.

CONT. CLEAT W/ SLOTTED OR OVERSIZED HOLES @ 24+O.C.

CONT. CLEAT W/ SLOTTED OR OVERSIZED HOLES @ 24+O.C.

SEALANT

WOOD NAILER W/ ANCHOR BOLTS

ROOF MEMBRANE

CANT STRIP


SEALANT

BOND BEAM OR GROUT CORES SOLID AT ANCHOR BOLTS

FACE BRICK

RIGID INSULATION

CONCRETE MASONRY BACKUP TREATED W/ AIR/ VAPOR/ MOISTURE BARRIER AS REQ ϕ

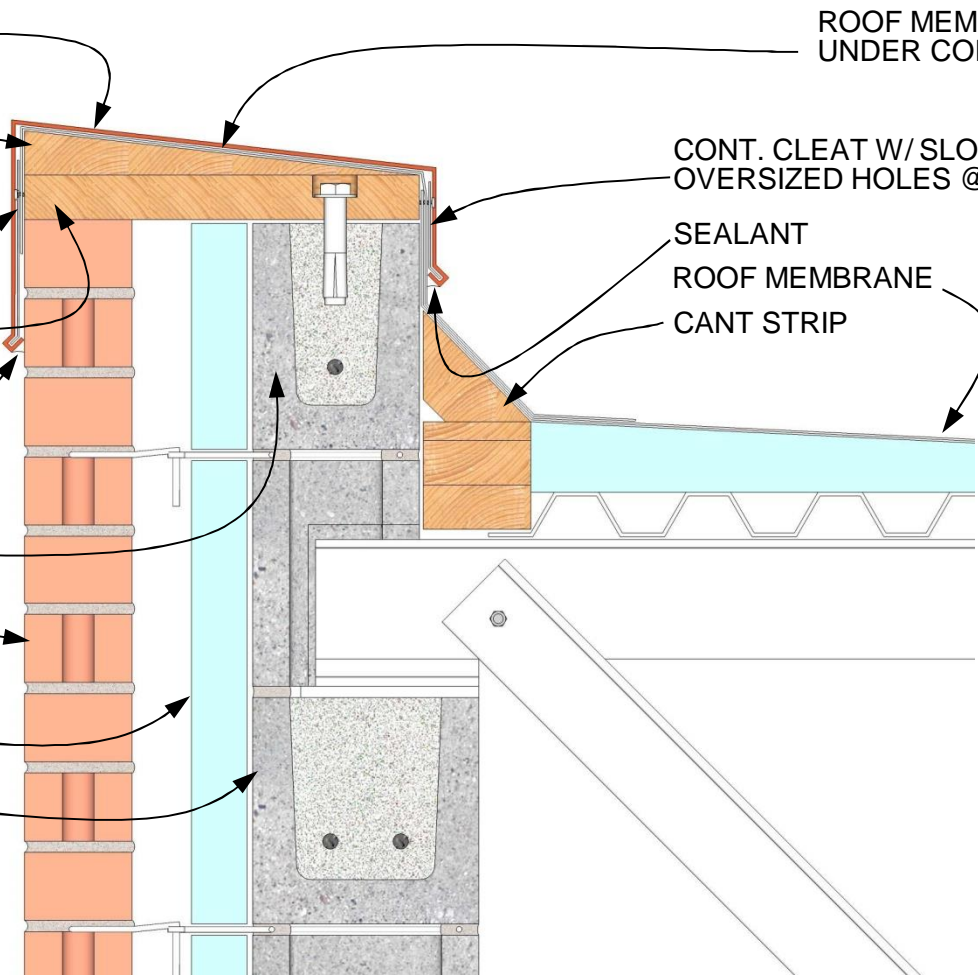

METAL COPING DETAIL

DETAIL 01.030.0803.2D REV. 11/20/07

International Masonry Institute



800-IMI-0988 www.imiweb.org

© 2011 INTERNATIONAL MASONRY INSTITUTE