


3D view

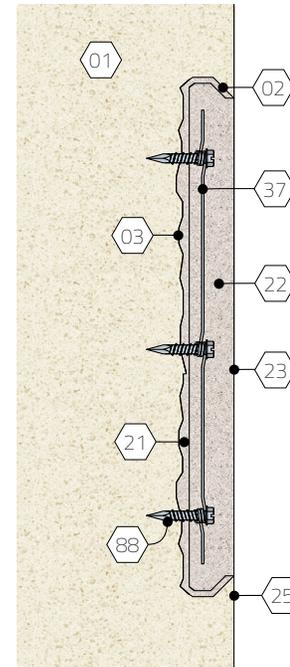

Section view

KEY NOTES

- 01 Existing masonry unit (e.g. stone, terra cotta, cast stone, etc.)
- 02 Saw-cut and key perimeter edge
- 03 Chip unit to rough surface; clean surface of dust and debris; prior to mortar placement, surface must be saturated surface dry (SSD) or surface moisture as required by composite mortar manufacturer
- 21 Base coat
- 22 Composite mortar
- 23 Finish to match existing profile and color; apply coating to match existing glaze or finish if required
- 25 Clean surface of unit after repair
- 88 Stainless steel masonry screw, appropriate type, size, spacing, and embedment depth
- 37 Stainless steel wire wrapped around screws, gauge as appropriate

KEYWORDS

Restoration, Repair, Masonry, Stone, Terra cotta, Cast stone, Composite mortar, Small patch, 10.4 10.0502

TITLE

Composite mortar repair | Small area (1 s.f. ±)

SCALE

Varies

REV.

05/06/20

SHEET NO.

10.410.0502